



## Part # 2010 JK Fuse box Mount - All


Included:  
Aluminum Trigger Mount ("Fuse box").  
8x Mounting Screws/nuts

NOTE: Requires 1/8" drill bit/body for installation



### Installation:

- 1) Slide Trigger mount in place on the factory fuse box lid. Be sure there is nothing that will interfere with the Trigger controller when installed, re-position mount as necessary. NOTE: Check the inside of the fuse box to be certain the mounting screws will not cause interference inside anywhere.
- 2) Mark the screw locations on the lid of the fuse box and drill 1/8" holes for the included mounting screws/nuts. NOTE; Multiple locations are provided for the mounting screws. You can use screws at the positions shown at "A", "B" or both below to attach the mount to the lid.
- 3) Now use the 4 included screws and nuts to attach the Trigger controller to the bracket.

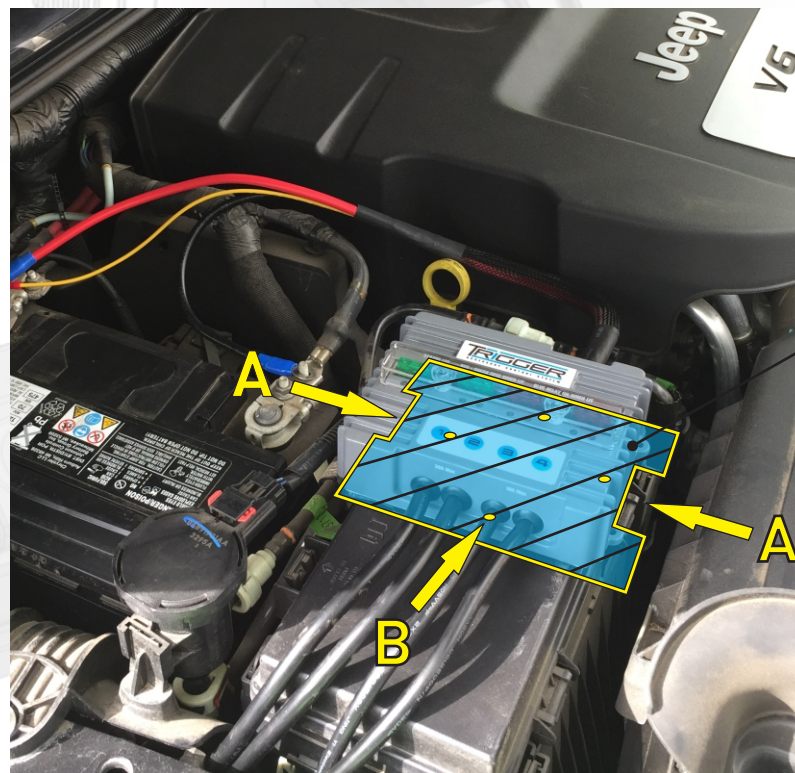

Trigger mount

NOTE: Route wires as required depending on installation requirements.