




TECH BULLETIN

Wiring the RF remote for 12 volt power on JK Rear View Mirror


PLEASE NOTE: Always double check voltage and continuity of wires before tapping

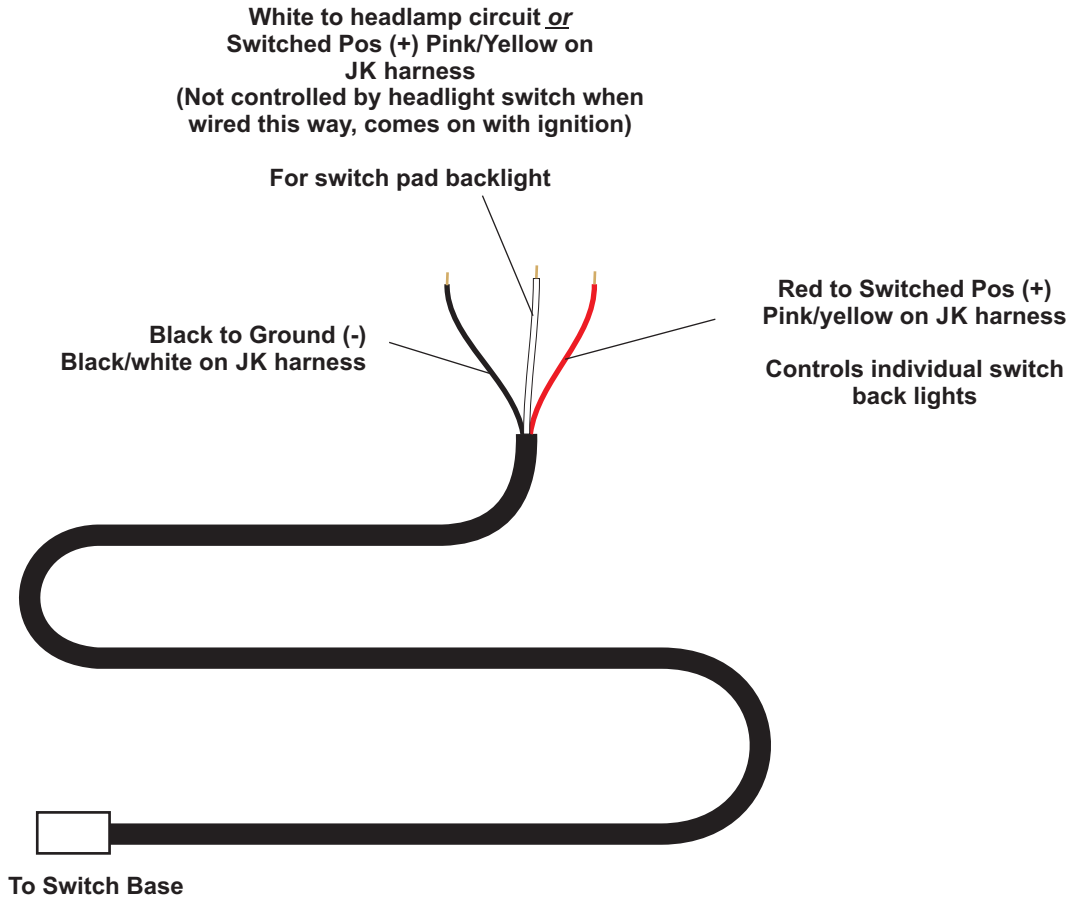

Wiring for the back lighting on the RF switch pad includes 3 wires for connection. The RED is used to back light the individual switches when they are turned on and should be connected to switched ignition (Pink/yellow on JK).

The WHITE wire is for the backlighting behind the switches and can be connected to the headlamp circuit OR to the same place as the red wire (switched ignition - Pink/yellow on JK). This allows the backlighting to come on only when the headlights are on.

The black wire is for ground (Black/white on JK).

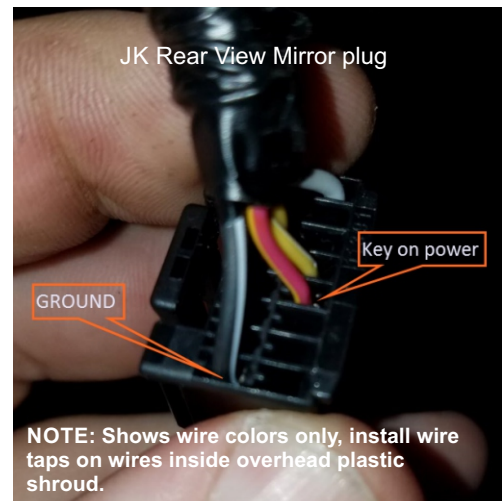

www.triggercontroller.com